Thank you for purchasing a Rosewill Case.
Please read the instruction manual before use and retain for future reference.

PRODUCT OVERVIEW

Product Diagram

Top Panel

SSD Plate

SSD

HDD Cage Panel

8cm Fan

PSU

Hot Swap Tray

Motherboard

12038 PWM Fan

HDD
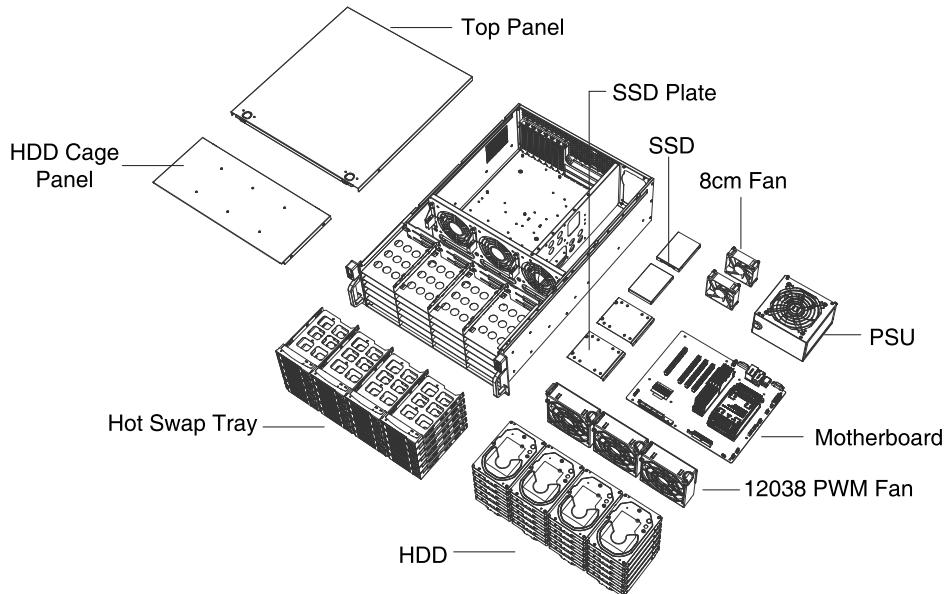
Dimensions (W x H x D): 650 x 431 x 177 mm (25.59" × 16.97" × 6.97")

431 mm (16.97")

650 mm (25.59")

177 mm (6.97")

Accessory Kit

x3 — Motherboard Standoff	x8 — Screws	x100 — Screws	x15 — Screws
Motherboard	Power Supply	3.5" HDD	Motherboard

|	
x10 — Screws	
2.5" HDD	CRPS Rack
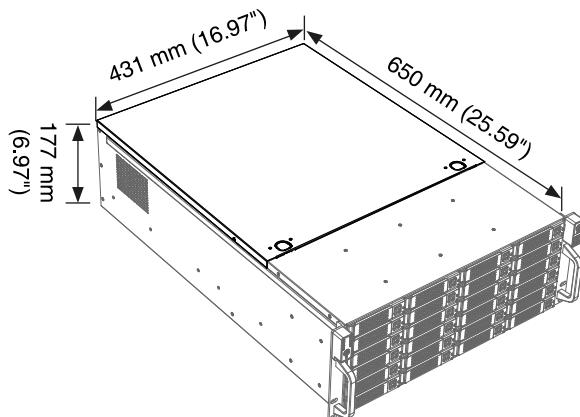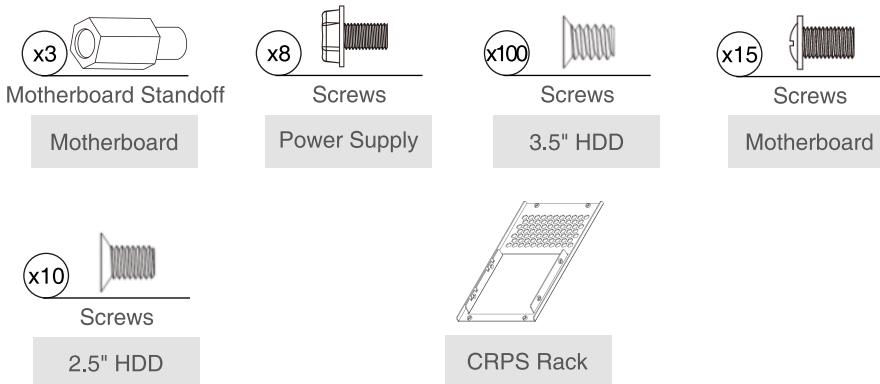
INSTALLATION GUIDE

Please remove all packaging materials before proceeding to disassembly/assembly.

1. Remove the Top Panel

Loosen the two screws on the side panel, then press and hold both one-click locks while gently removing the top panel.

1
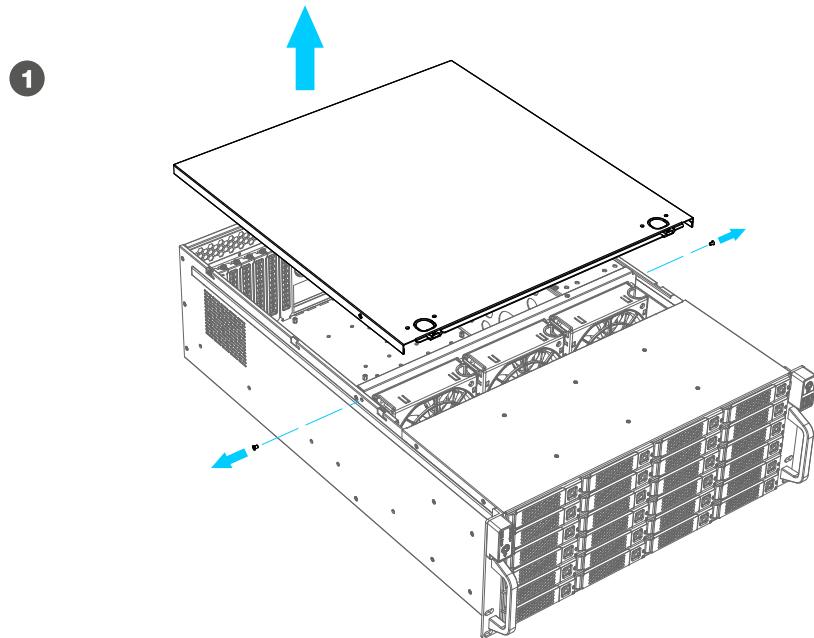
2. Install the HDD

Mount the HDD onto the hot-swap tray and reinsert the HDD cage.

2
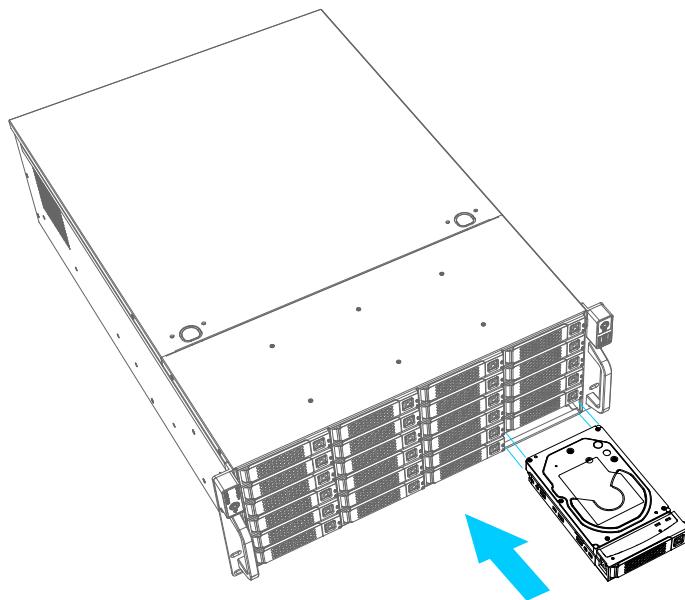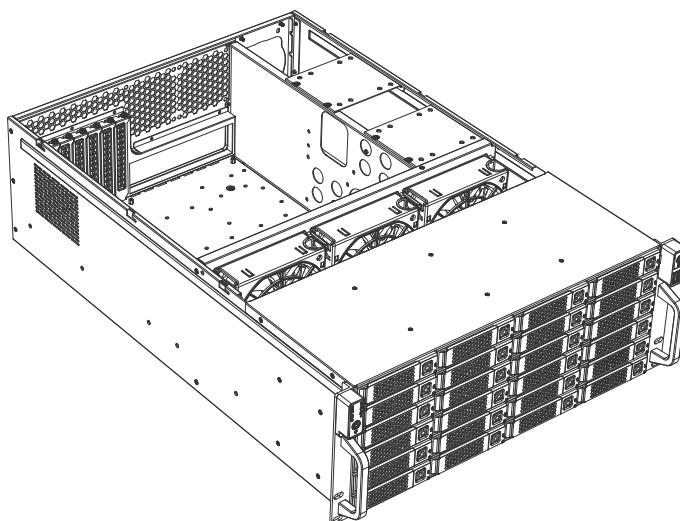
3. Install the Motherboard

3
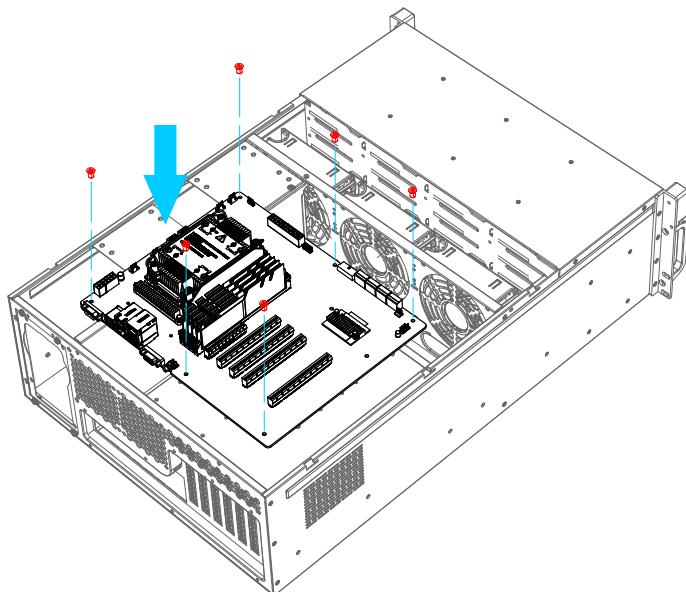
4. Install the GPU

4
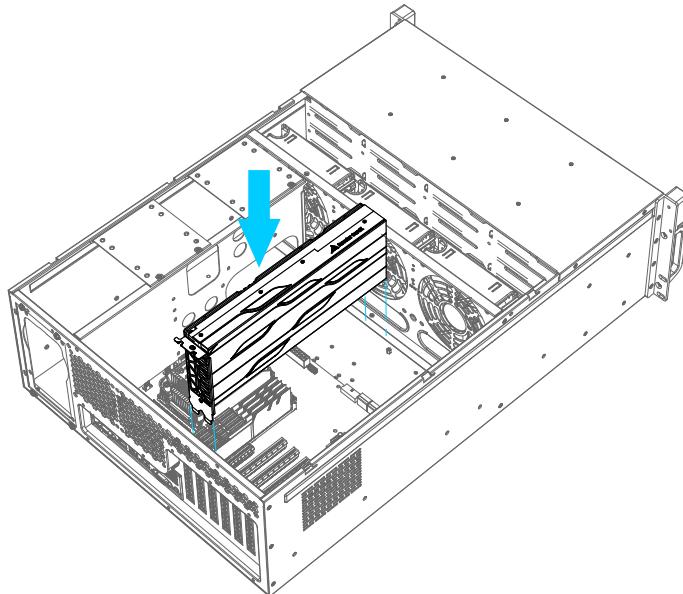
5. Install the PSU

5
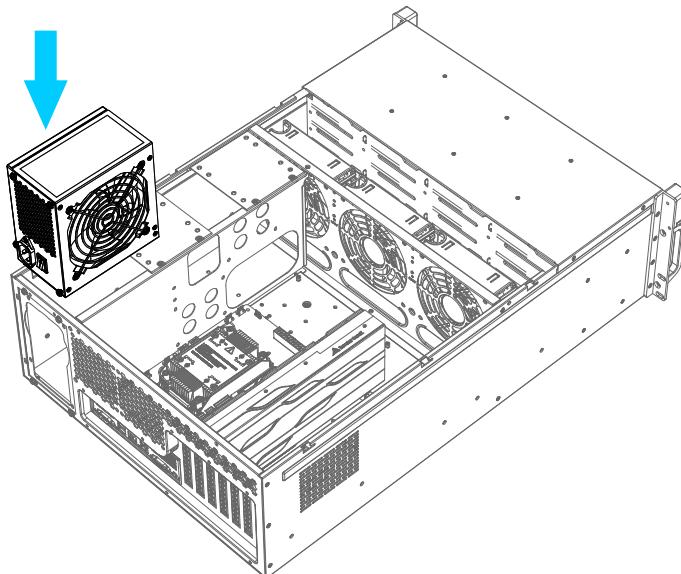
6. Install the Radiator

6
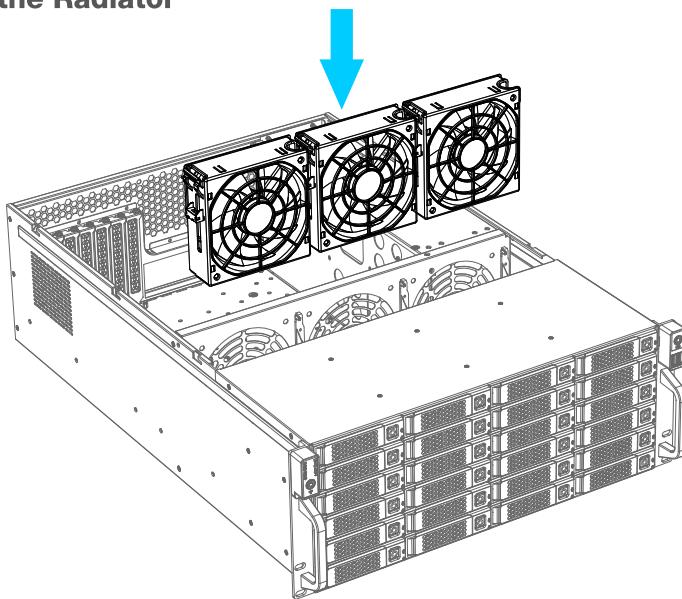
SPECIFICATIONS

Model	
Model Name	RSV-H424
Specifications	
Chassis Type	Rackmount
Form Factor	4U
Color	Silver & Black
Case Material	SGCC
Motherboard Compatibility	12" x 13" E-ATX, 12" x 9.6" ATX, 11.2" x 8.2" Mini-ATX and below
Power Supply	Supports ATX power supply
Hot-Swap Drive Bays	24 (SFF8643 with SGPIO and Temperature Control)
External 3.5 Drive Bays	-
Internal 3.5" Drive Bays	-
Internal 2.5" Drive Bays	-
Expansion Slots	7
Front USB	2 x USB 3.0
80mm Fans	-
120mm Fans	Middle: 3 × 120mm fans (3 × 12038 PWM fan included)
Physical Specification	650 x 431 x 177 mm / 25.59" × 16.97" × 6.97"

RSV-H424